

230 V_{AC} ICAO Low-intensity, Type B Obstacle Light
230 V_{AC} FAA Type L-810 Low Intensity Obstacle Light

Key features

- Based on LED-technology
- Extremely reliable - long lifetime
- Very low power consumption
- 230 V AC nominal supply voltage
- Intensity more than 32.5 cd
- Stabilised light output
- Easy to install

Benefits

- Long maintenance intervals
- Low energy cost
- Supply power voltage variations do not affect to light output
- Very low total lifetime costs
- Comes with five (5) years warranty

Specifications met

- ICAO International Standards and Recommended Practices:
Aerodromes - Annex 14 Volume 1, 5th Edition, July 2009,
Chapter 6: Low-intensity, Type B Fixed Obstacle Light
- FAA Advisory Circular 150/5345-43F 09/12/06 L-810 Light Unit

Optical characteristics

- Intensity better than 32,5 cd
- Colour aviation red
- Horizontal radiation pattern 360°
- Vertical radiation pattern 50°
- LED supply current stabilised by constant current generator
- Light output degradation less than 30% after 100.000 h of operation

Electrical characteristics

- LEDs in several separate groups
- Nominal operating voltage 230 V_{AC}
- Power consumption 3.5 VA
- Operating voltage range 210 to 270 V_{AC}
- Two-stage over-voltage protection

Mechanical characteristics


- Yellow ABS body
- Weather protection to IP 30
- Operating temperature range -55°C ... +55°C
- Height 100 mm, diameter 92 mm, weight 0.4 kg

Ordering Code: **Obelux 32-230-E27**

Made in Finland



Obelux 32-230-E27

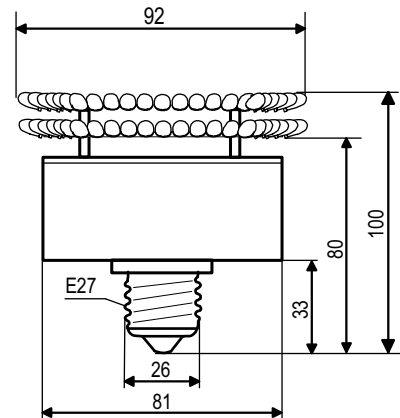

OPERATING VOLTAGE
230 V_{AC}



CAUTION ! LED RADIATION

DO NOT STARE INTO LED BEAM OR VIEW
DIRECTLY WITH OPTICAL INSTRUMENTS.
CLASS 2A LED PRODUCT

Technical information in this document is subject to change without notice. Copyright © Obelux Oy 2011