

Key features

- Extremely reliable - long lifetime
- Optimised for Obelux LED-obstacle lights
- 115 V AC, 50-60 Hz input voltage / 48 V DC output voltage
- Degree of protection IP67
- Die cast aluminium enclosure
- Easy to install
- No RF-radiations

Electrical characteristics

- 115 V AC 50-60 Hz input voltage
- Power consumption max 90 VA
- Output voltage 48 V DC
- Maximum output current 1.8 A


Mechanical characteristics

- Yellow powder painted die cast aluminium body
- Degree of protection to IP67
- Operating temperature range -55°C ... +55°C
- Height 348 mm, width 205 mm, depth 115 mm
- Weight 4 kg


**Obelux PS-115-48-01A8 Power Supply****Order Code: Obelux PS-115-48-01A8****Obelux PS-115-48-01A8-PCFL (with Photocell & Flash Controller)****Warranty: 5 year**

Made in Finland

Technical information in this document is subject to change without notice. Copyright © Obelux Oy 2009

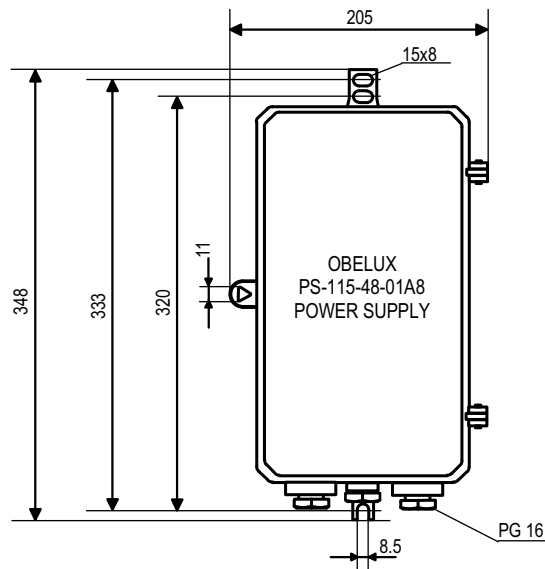

Mechanical dimensions

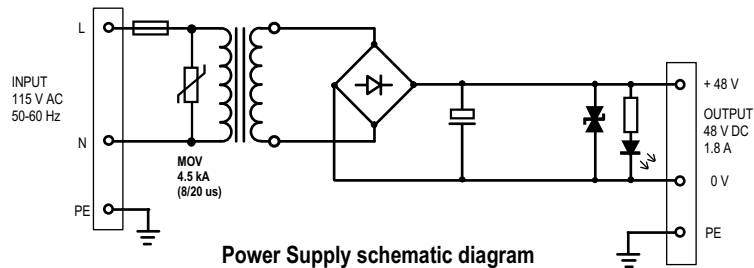

Power Supply schematic diagram