

12 V / 5 A DC Power Supply for Obelux Obstacle lights**Key features**

- Extremely reliable - long lifetime
- Optimised for Obelux 10-12-F and 32-12-F obstacle lights
- 230 or 115 V AC input voltage / 12 V DC output voltage
- Degree of protection IP67
- Die cast aluminium enclosure
- Easy to install
- No RF-radiations

Electrical characteristics

- Input voltage 230 or 115 V AC
- Power consumption max 100 VA
- Output voltage 13 V DC typical
- Maximum output current 5 A


Mechanical characteristics

- Yellow powder painted die cast aluminium body
- Degree of protection to IP67
- Operating temperature range -55°C ... $+55^{\circ}\text{C}$
- Height 348 mm, width 205 mm, depth 115 mm
- Weight 3 kg

Order codes:

- Obelux PS-230-12-05 for 230 Vac system
- Obelux PS-230-12-05-PCFL for 230 Vac system with flasher
- Obelux PS-115-12-05 for 115 Vac system
- Obelux PS-115-12-05-PCFL for 115 Vac system with flasher

Made in Finland

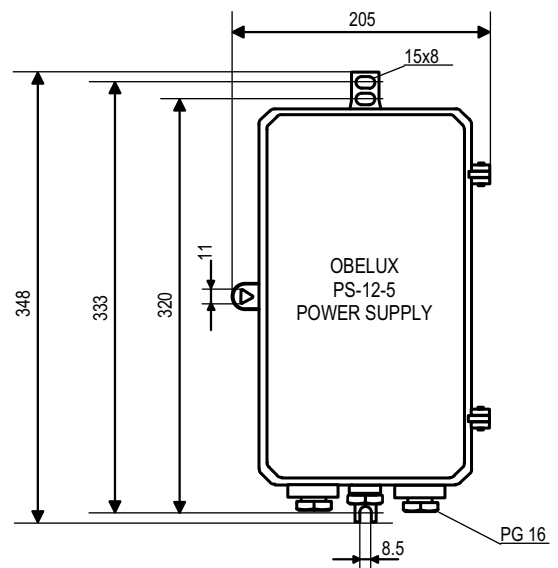

Technical information in this document is subject to change without notice. Copyright © Obelux Oy 2012