

**24 V / 9 A DC Power Supply for Obelux Obstacle lights****Key features**

- Extremely reliable - long lifetime
- Optimised for Obelux LED-obstacle lights
- Degree of protection IP67
- Die cast aluminium enclosure
- Easy to install
- No RF-radiations
- 5 years warranty

**Electrical characteristics**

- Input voltage 230 or 115 V AC
- Power consumption max 220 VA
- Output voltage 24 V DC
- Maximum output current 9 A

**Mechanical characteristics**

- Yellow powder painted die cast aluminium body
- Degree of protection to IP67
- Operating temperature range -55°C to +55°C
- Height 348 mm, width 205 mm, depth 115 mm
- Weight 4 kg


**Obelux PS-230-24-09 Power Supply****Order codes:**

Obelux PS-230-24-09 for 230 Vac system  
Obelux PS-115-24-09 for 115 Vac system


Made in Finland

Technical information in this document is subject to change without notice. Copyright © Obelux Oy 2012

24 V / 9 A DC Power Supply for Obelux Obstacle lights

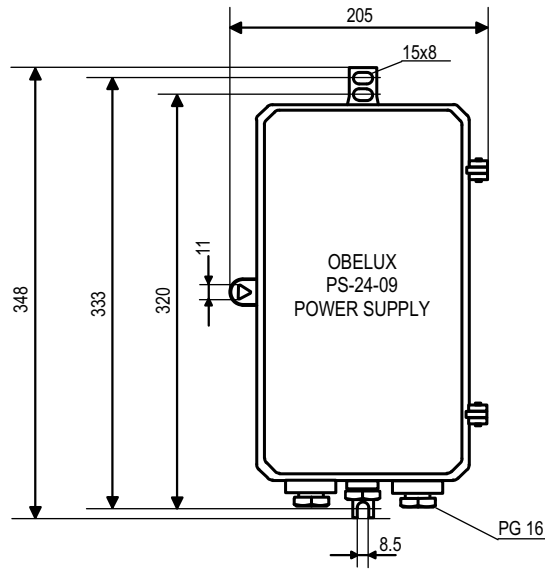

Mechanical dimensions

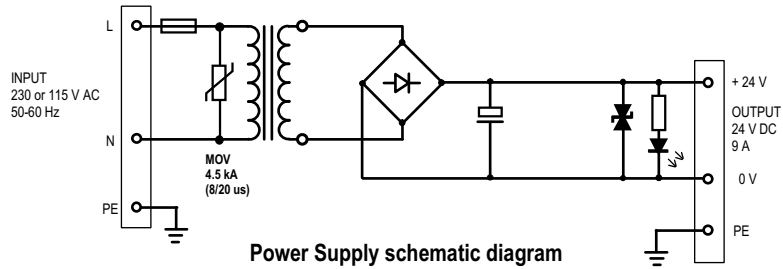

Power Supply schematic diagram

Technical information in this document is subject to change without notice. Copyright © Obelux Oy 2012