

48 V / 5 A DC Power Supply for Obelux Obstacle lights**Key features**

- Extremely reliable - long lifetime
- Optimised for Obelux 10-48-F, 32-48-F and MI-IF-048 (2000 cd luminous output) LED-obstacle lights
- Degree of protection IP67
- Die cast aluminium enclosure
- Easy to install
- No RF-radiations
- 5 years warranty

Electrical characteristics

- Input voltage 230 or 115 V AC
- Power consumption max 220 VA
- Output voltage 48 V DC
- Maximum output current 5 A

Mechanical characteristics

- Yellow powder painted die cast aluminium body
- Degree of protection IP67
- Operating temperature range -55°C ... +55°C
- Height 348 mm, width 205 mm, depth 115 mm
- Weight 4 kg


**Obelux PS-48-05 Power Supply****Order codes:**

- Obelux PS-230-48-05 for 230 Vac system
- Obelux PS-115-48-05 for 115 Vac system


Made in Finland

Technical information in this document is subject to change without notice. Copyright © Obelux Oy 2012

48 V / 5 A DC Power Supply for Obelux Obstacle lights

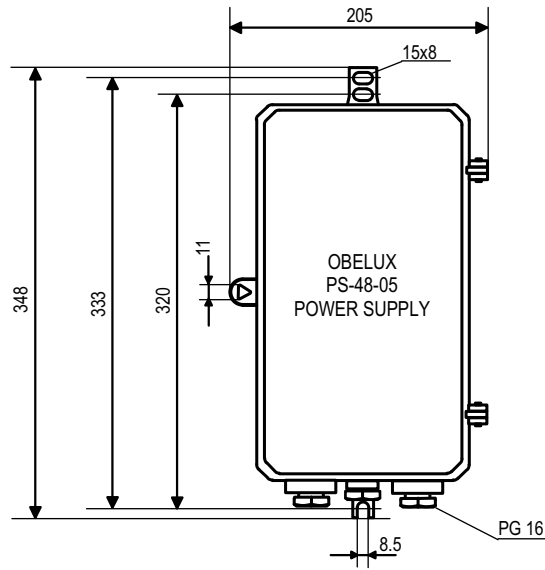

Mechanical dimensions

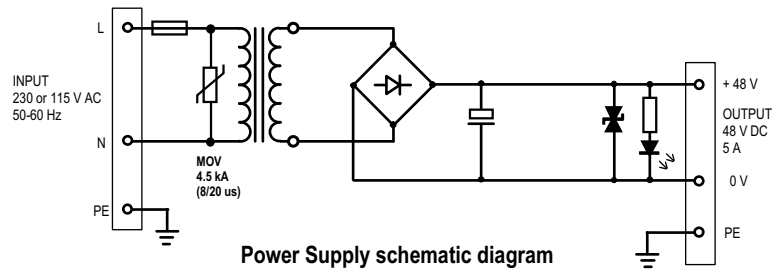

Power Supply schematic diagram

Technical information in this document is subject to change without notice. Copyright © Obelux Oy 2012